


# SUB BOTTOM PROFILING

## HIGH VOLTAGE BOOMER OR SPARKER CABLES



- **Very high quality, high strength HV Cable for use with AAE integrated Boomer/Sparker systems and other sources.**
- **Terminated with robust connectors at both ends. (Joy-Plugs & Solder Tags for use with AAE Junction Box).**
- **Complete with Kellums Grip for strain-free connection to towed sound source.**
- **Comes with heavy duty Polyurethane Jacket for protection, insulation and durability.**
- **Available for Boomer/Squid 500 or Squid 2000 sound sources.**

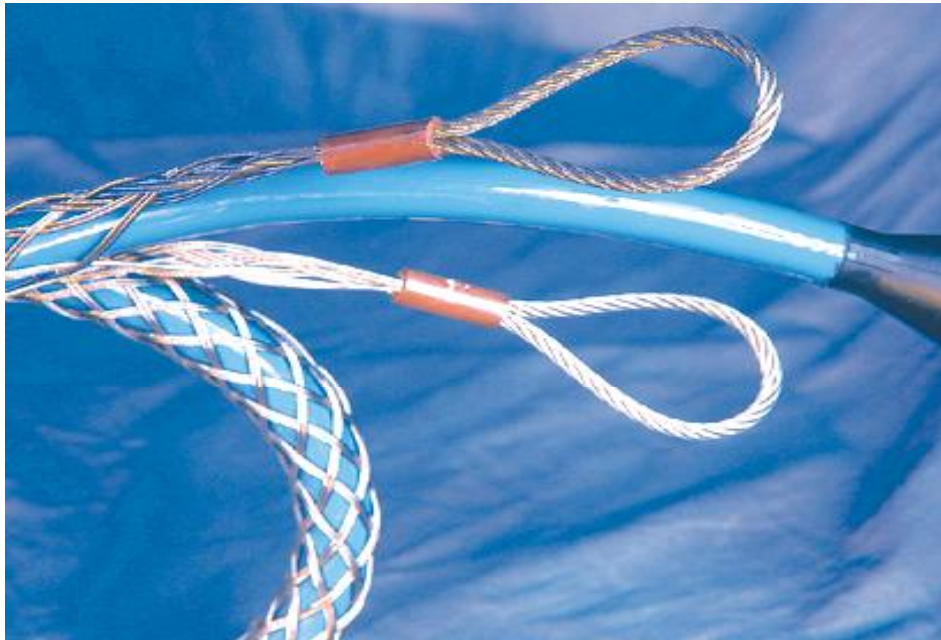

Terminated cable 50m long with 4 x 10mm SQ conductors.

Terminated with robust Joyplugs and Kellums Grip for connection to sound source and Solder Tags for connection to an AAE Junction Box.

25mm diameter cable.

Specially designed with polyurethane jacket.

Available in standard 50m length or in length of choice.

Weight in air: 33kg.

December 2001



Marine House, Marine Park, Gapton Hall Road, Great Yarmouth, NR31 0NL, England  
Tel: + 44 (0) 1493 440355 Fax: + 44 (0) 1493 440720  
[www.appliedacoustics.com](http://www.appliedacoustics.com) email: [general@appliedacoustics.com](mailto:general@appliedacoustics.com)

**Due to continual product improvement these specifications may be subject to change without notice.**