

Crescent[®] OEM BOARD


SETTING NEW INDUSTRY STANDARDS FOR ACCURACY, PERFORMANCE, AND PRICE



Create more advanced applications and sophisticated configurations with the Crescent OEM Board's higher update rates, noise-reduced raw measurements, additional memory, and higher processor capability.



The 12-channel, L1 DGPS board features SBAS support, along with our exclusive COAST™ and e-Dif® technologies, making it easy to get an accurate signal, anytime, anywhere. Accuracy and stability are excellent due to Crescent receiver technology's more accurate code phase measurements, multipath mitigation improvements, and fewer discrete receiver components.

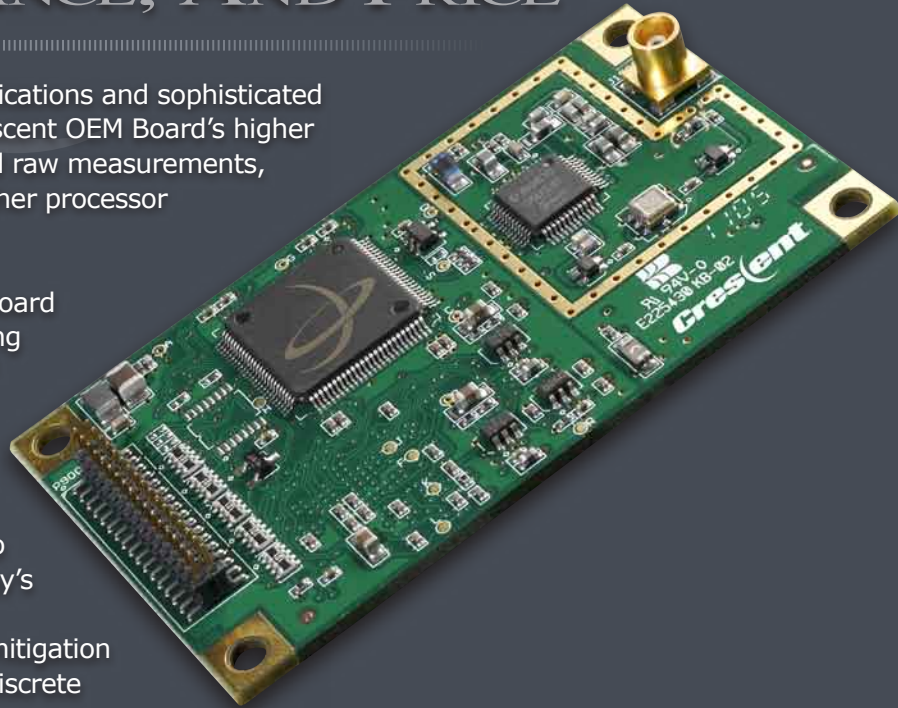

KEY CRESCENT OEM BOARD ADVANTAGES:

- Extremely affordable DGPS solution with update rates of up to 20 Hz
- Fast start-up and reacquisition times allow you to get right to work
- High-precision, differential positioning accuracy of 50 cm, 95% of the time
- COAST stability during temporary differential signal outage
- Exclusive e-Dif option where other differential signals are not practical
- Small form and low-power consumption design is ideal for easy integration
- Compatible with other differential sources through RTCM support

Hemisphere
GPS

Calgary • Hiawatha • Kansas City • Scottsdale

Crescent[®] OEM BOARD

GENERAL SPECIFICATIONS

GPS Sensor Specifications

Receiver Type:

L1, C/A code, with carrier phase smoothing

Channels: 12-channel, parallel tracking
(10-channel when tracking SBAS)

SBAS Tracking: 2-channel, parallel tracking

Update Rate: 20 Hz maximum

Horizontal Accuracy:

< 20 cm 95% confidence (L-Dif™)*

< 0.5 m 95% confidence (DGPS)**

< 2.5 m 95% confidence (autonomous, no SA)***

Cold Start: 60 s (no almanac or RTC)

Warm Start 1: 45 s (valid almanac, no RTC)

Warm Start 2: 35 s (valid almanac and RTC)

Hot Start: 20 s (valid almanac, RTC, and
< 2 hours since last fix)

Reacquisition: < 1 s

Maximum Speed: 1607 kph (999 MPH)

Maximum Altitude: 18,288 m (60,000 ft)

Communications

Serial Ports: 3 full duplex 3.3 V CMOS, 1 USB

Baud Rates: 4800-57600

Correction I/O Protocol: RTCM SC-104

(SBAS/Beacon), Proprietary format (L-Dif/RTK)

Data I/O Protocol: NMEA 0183, SLX binary

Timing Output: 1 PPS (HCMOS, active high,
rising edge sync, 10 kΩ, 10 pF load)

Event Marker Input: HCMOS, active low,
falling edge sync, 10 kΩ, 10 pF load

Environmental

Operating Temperature: -30°C to +70°C

Storage Temperature: -40°C to +85°C

Humidity: 95% non-condensing

Shock: EP 455

Vibration: EP 455

Power

Input Voltage: 3.3 VDC ± 3%

Power Consumption: <1 W nominal

Current Consumption: 300 mA nominal

Antenna Voltage Input: 15 VDC maximum

Antenna Short Circuit Protection: Yes

Antenna Gain Input Range: 10 to 40 dB

Antenna Input Impedance: 50 Ω

Mechanical

Dimensions: 71.1 L x 40.6 W x 12.0 H mm
(2.8 L x 1.6 W x 0.5 H in)

Weight: <20 g (<0.75 oz)

Status Indication: 4 surface-mount LEDs
indicating power, GPS lock, differential
lock, and DGPS position

Power/Data Connector: 34-pin male header, 0.05" pitch


Antenna Connector: MCX, female, straight

* Depends on multipath environment, number of satellites in view, satellite geometry, L-Dif baseline length and ionospheric activity

** Depends on multipath environment, number of satellites in view, satellite geometry, baseline length (for local services) and ionospheric activity

*** Depends on multipath environment, number of satellites in view, satellite geometry, and ionospheric activity

Crescent OEM Board

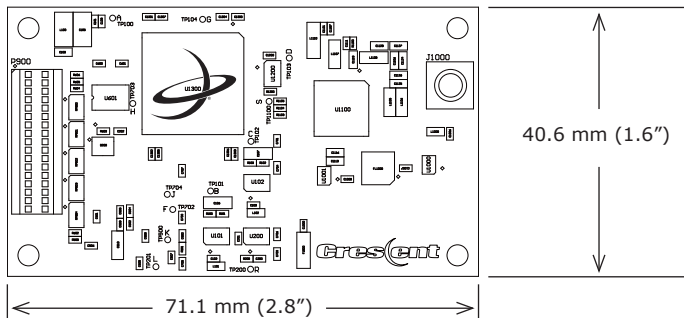

www.hemispheregps.com
e-mail: info@hemispheregps.com

Calgary Office
4110-9th St. SE
Calgary, AB, Canada T2G 3C4
Phone: 403-259-3311
Fax: 403-259-8866