

Hydrophone TC4013

Miniature Reference Hydrophone



The TC4013 offers a usable frequency range of 1Hz to 170kHz and a high sensitivity relative to its size. It furthermore provides uniform omnidirectional sensitivities in both horizontal and vertical planes up to high frequencies.

The TC4013 is an excellent transducer for making absolute sound measurements and calibrations within a broad frequency range. It can also be applied as an omnidirectional reference projector.

The overall characteristics make TC4013 extremely applicable for laboratory as well as industrial uses.

NBR means Nitrile Rubber

The NBR rubber is first of all resistant to sea and fresh water but also resistant to oil. It is limited resistant to petrol, limited resistant to most acids and will be destroyed by base, strong acids, halogenated hydrocarbons (carbon tetrachloride, trichloroethylene), nitro hydrocarbons (nitrobenzene, aniline), phosphate ester hydraulic fluids, Ketones (MEK, acetone), Ozone and automotive brake fluid.

TECHNICAL SPECIFICATIONS

Usable frequency range:	1Hz to 170kHz
Receiving sensitivity:	-211dB ±3dB re 1V/μPa
Transmitting sensitivity:	130dB ±3dB re 1μPa/V at 1m at 100kHz
Horizontal directivity pattern:	Omnidirectional ±2dB at 100kHz
Vertical directivity pattern:	270° ±3dB at 100kHz
Nominal capacitance:	3.4nF
Operating depth:	700m
Survival depth:	1000m
Operating temperature range:	-2°C to +80°C
Storage temperature range:	-40°C to +80°C
Weight (in air):	75g
Cable length:	Standard length 6m. Optional cable lengths available on request
Encapsulating material:	Special formulated NBR



PRODUCT BENEFITS

- High sensitivity
- Omnidirectional to high frequencies
- Broadband
- O-ring sealed mounting
- Individually calibrated




TELEDYNE MARINE
RESON
 Everywheryoulook™


Hydrophone TC4013

Miniature Reference Hydrophone


Horizontal directivity pattern

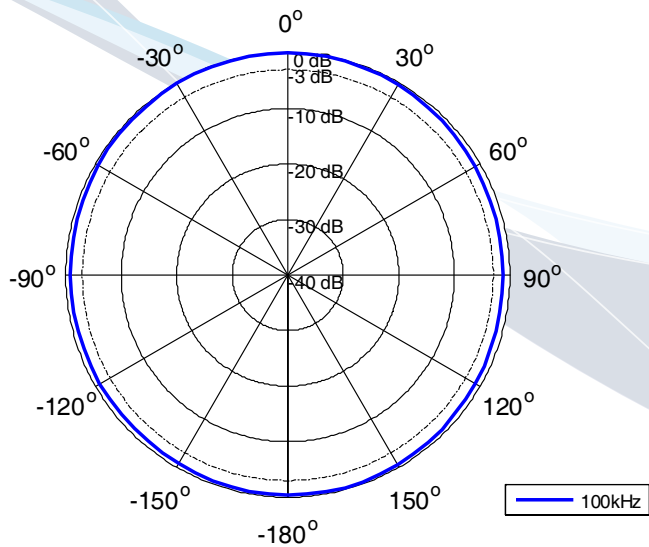


Receiving Sensitivity [dB re 1V/ μ Pa @ 1m]

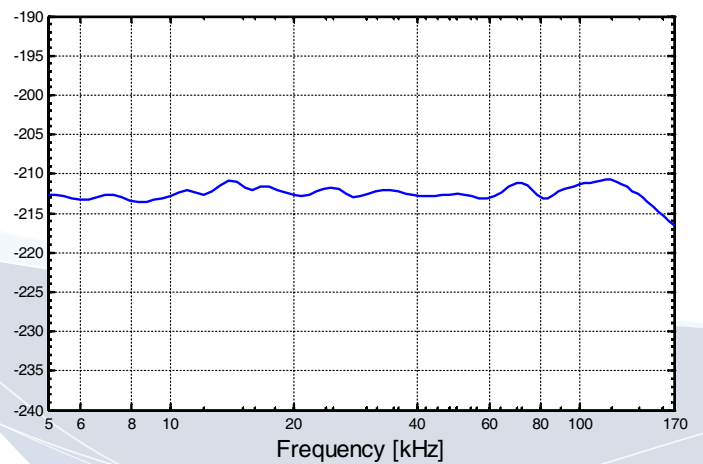

Transmitting Sensitivity [dB re 1 μ Pa/V @ 1m]

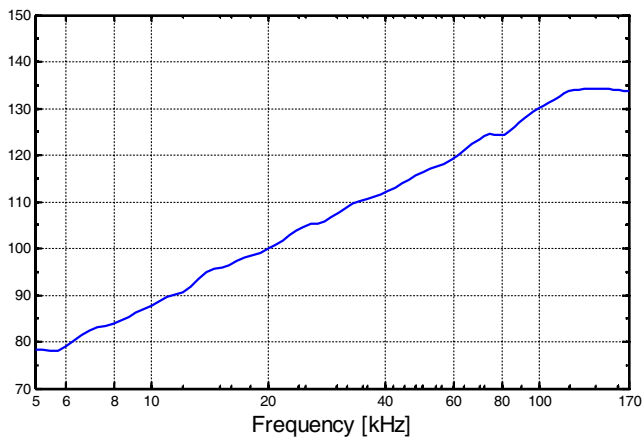

Impedance

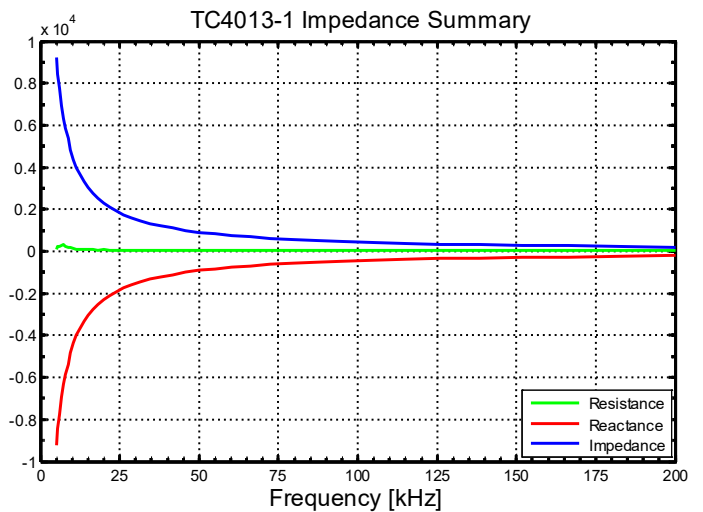


Hydrophone TC4013


Miniature Reference Hydrophone




Outline Dimensions

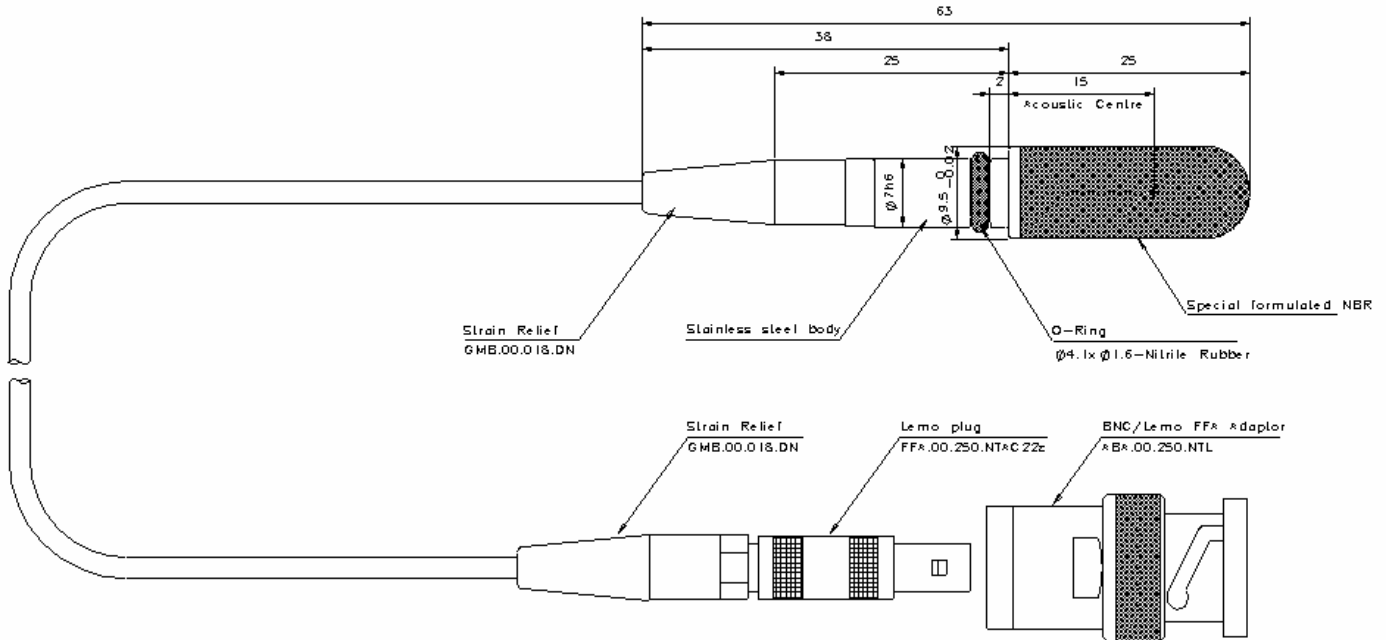

Electrical Diagram

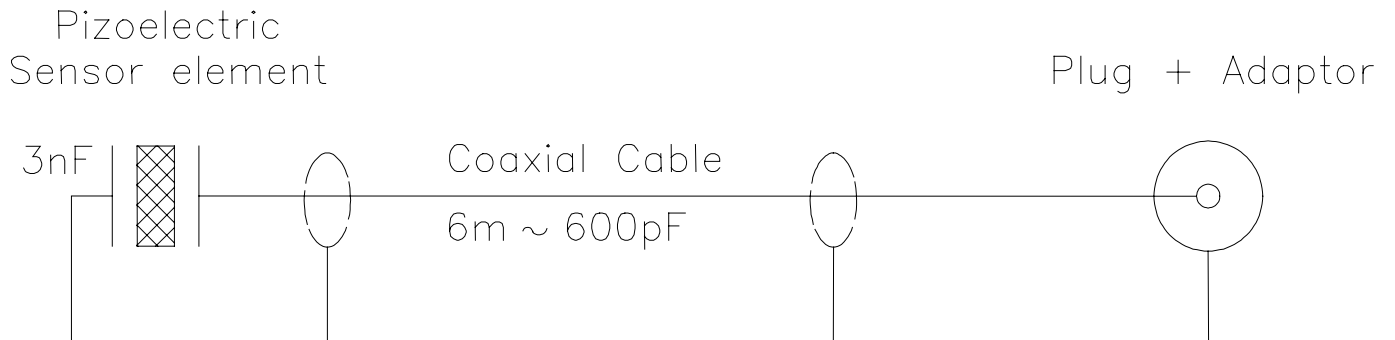

For information on export control regulations on this product, please refer to www.teledynemarine.com/reson

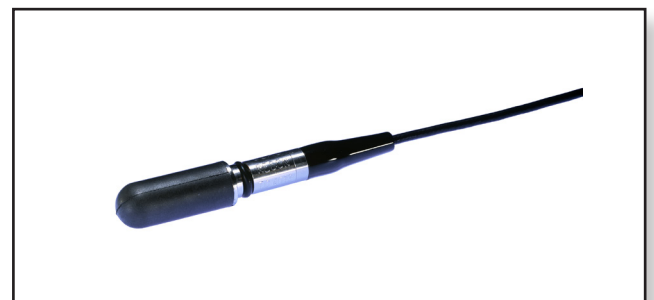

TELEDYNE MARINE
RESON
 Everywherelook™

www.teledynemarine.com/reson

Tel. +45 4738 0022 (Europe) • Tel: +1 805 964 6260 (USA)

Email: reson@teledyne.com